
SD-WAN with Tertiary Link

Indoor, 5G/4G LTE connectivity with an SD-WAN Device to augment the bandwidth and provide additional redundancy plus secure OOBM Functionality.





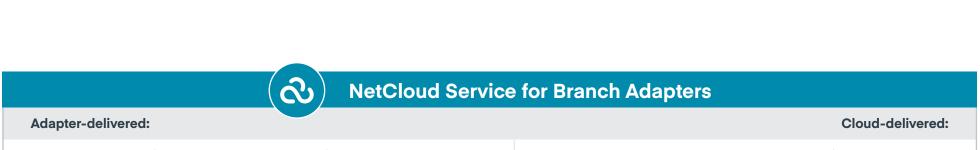

Wireless WAN

✓ 4G LTE

✓ Carrier Aggregation

✓ 5G FR1/Low-Mid Band

- 5G FR2

Adapter Modes

- Captive Modem

✓ IP Passthrough (IPPT)

- IPPT with Inline Failover

- NAT Mode

Connection Manager

✓ Software-Defined Modem

2.5 GbE LAN

Connectivity

- Smart WAN Selection

- Failover / Failback

Load Balancing

Remote Connect

Embedded 5G NR / 4G LTE

Cat 20 Modem

✓ Out-of-Band Manager

✓ LAN Manager

Console

✓ Local Device UI

Management

✓ Policy Definition

Dual Connectivity

5G / 4G LTE

✓ Configuration

✓ Troubleshooting

✓ Software Lifecycle

Insights & Analytics

Ethernet as

primary

✓ App Analytics

✓ Reporting

✓ Alerting

✓ Usage Analytics